



**HIMOINSA®**  
THE ENERGY

MODEL  
**HMW-1375 T5**  
HEAVY RANGE  
Container  
Powered by MTU



- 40 FT HC
- WATER-COOLED
- THREE PHASE
- 50 HZ
- DIESEL

## Generating Rates



SERVICE		PRP	STANDBY
Power	kVA	1370	1500
Power	kW	1096	1200
Rated Speed	r.p.m.	1.500	
Standard Voltage	V	400/230	
Available Voltages	V	380/220 - 415/240	
Rated at power factor	Cos Phi	0,8	

01

**HIMOINSA Company with quality certification ISO 9001**

**HIMOINSA gensets are compliant with EC mark which includes the following directives:**

- 2006/42/CE Machinery safety.
- 2006/95/EC Low voltage.
- 2004/108/CE Electromagnetic compatibility.
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- 97/68/EC Emissions of gaseous and particulate pollutants. (amended by 2002/88/EC & 2004/26/EC)
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference according to ISO 8528-1:2005 normative: 1000 mbar, 25°C, 30% relative humidity.

**Prime Power (PRP):**

According to ISO 8528-1:2005, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24 h of operation shall not exceed 70 % of the PRP.

**Emergency Standby Power (ESP):**

According to ISO 8528-1:2005, Emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP

**HIMOINSA HEADQUARTERS:**

Fábrica: Ctra. Murcia - San Javier, Km. 23,6 | 30730 SAN JAVIER (Murcia) Spain  
Tel.+34 968 19 11 28 Fax +34 968 19 12 17 Fax +34 968 19 04 20 info@himoinsa.com www.himoinsa.com

**Manufacture facilities:**

SPAIN • FRANCE • INDIA • CHINA • USA • BRASIL

**Subsidiaries:**

ITALY | PORTUGAL | POLAND | GERMANY | SINGAPORE | UAE | MEXICO | PANAMÁ | ARGENTINA | UK



Ctra. Murcia - San Javier, km. 23,6 | 30730 San Javier (Murcia) SPAIN | Tel.: +34 902 19 11 28 / +34 968 19 11 28  
Fax: +34 968 19 12 17 | Export Fax +34 968 19 04 20 | E-mail: info@himoinsa.com | www.himoinsa.com





## Engine Specifications 1.500 r.p.m.

ENGINE		PRP	STANDBY
Rated Output	kW	1155	1275
Manufacturer		MTU	
Model		12V4000G23R	
Engine Type		Diesel 4 strokes-cycle	
Injection Type		Direct	
Aspiration Type		Turbocharged and aftercooled	
Cylinders Arrangement		12V	
Bore and Stroke	mm	170 x 210	
Displacement	L	57,2	
Cooling System		coolant	
Lube Oil Specifications		S10 W40	
Compression Ratio		16,5	
Fuel Consumption StandBy	l/h	297,35	
Fuel Consumption 100% PRP	l/h	273,23	
Fuel Consumption 75 % PRP	l/h	210,17	
Fuel Consumption 50 % PRP	l/h	148,52	
Fuel Consumption 25 % PRP	l/h	84,07	
Lube Oil Consumption Full Load		1 % of fuel consumption	
Total oil capacity including tubes, filters	L	260	
Total Coolant Capacity	L	570	
Governor	Type	Electrical	
Air Filter	Type	Dry	
Inner diameter exhaust pipe	mm	251	

02

## Generator

Generator		
Poles	Num	4
Winding Conections (standard)		Star
Frame Mounting		S-0 21"
Insulation	Class	H class
Enclosure (according IEC-34-5)		IP23
Exciter System		self-excited, brushless
Voltage Regulator		A.V.R. (Electronic)
Bearing		Single bearing
Coupling		Flexible disc
Coating type		Standard (Vacuum impregnation)



**HIMOINSA®**  
THE ENERGY

MODEL  
**HMW-1375 T5**  
HEAVY RANGE  
Container  
Powered by MTU

## Application Data

Exhaust System		
Maximum exhaust temperature	°C	440
Exhaust Gas Flow	m3/min	222
Maximum allowed back pressure	mbar	85

Air Inlet System		
Intake Air Flow	m3/h	5400
Cooling Air Flow	m3/s	36,11
Alternator fan air flow	m3/s	2,69

Starting System		
Starting Motor	kW	7,5 x 2
Starting Motor	CV	10,2 x 2
Recommended Battery Capacity	Ah	260
Auxiliary Voltage	Vcc	24
Current of starter (Rush)	A	1450
Current of starter (Cranking)	A	1300


Fuel System		
Fuel Oil Specifications		Diesel
Fuel Tank	L	2.000



**HIMOINSA®**  
THE ENERGY

MODEL  
**HMW-1375 T5**  
HEAVY RANGE  
Container  
Powered by MTU

## Dimensions

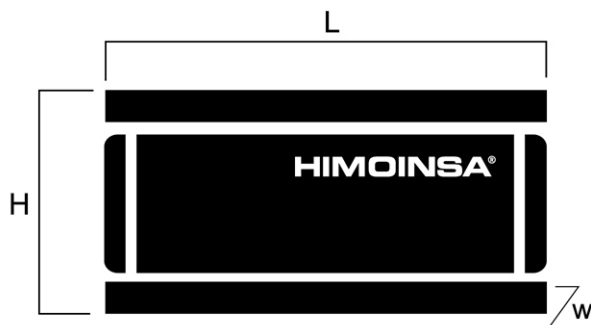

40 hc Weight and Dimensions			
(L) Length	mm	12.192	
(H) Height	mm	2.896	
(W) Width	mm	2.438	
Maximum shipping volume (standard supplier)		m3	86,08
(*) Wet weight	Kg	23.600	
Fuel tank capacity		L	2.000,0
Autonomy		Hours	10
Sound pressure level		dB(A)@7m	75 ± 2,3
(*) (with standard accessories)			


STANDARD VERSION

Himoinsa has the right to modify any characteristic without prior notice.  
Weights and dimensions based on standard products. Illustrations may include optional equipment.  
Technical data described here correspond with the available information at the moment of printing.  
Industrial design under patent.

Local Distributor



## Control Panel Models

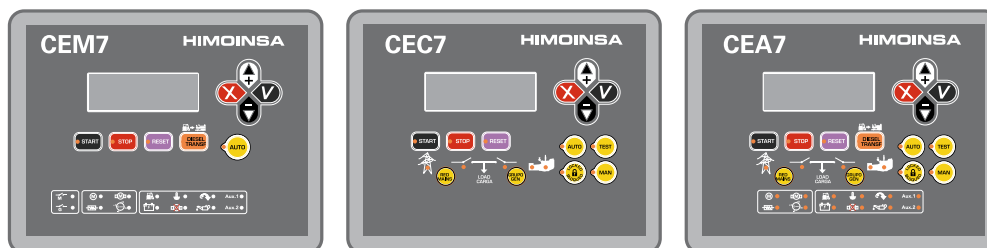

CEM7

CEC7

CEA7

FUNCTIONALITY	PANEL MODEL	CONTROLLER MODE
Auto-start	M5	CEM7
Automatic Control Panel Without Mains Control	AS5	CEM7**
Automatic Control Panel With Mains Control (customer change over contactors)	AS5	CEA7
Automatic Control Panel With Mains Control (Himoinsa change over contactor with display)	AS5XCC2	CEM7+CEC7
Automatic Mains Failure (wall mounted panel)	AC5	CEA7

(\*\*) Pre-heating resistance in the Genset and Battery charger in the control panel included.

Option available: Auto-start control panel without circuit breaker

05

## General Description

### CEM 7

The CEM7 controller unit is a device able to control de operation, monitoring and protection of a generating set. The controller unit consists of 2 different modules:

- 1.The VISUALIZATION module
- 2.The MEASUREMENTS module

#### VISUALIZATION MODULE

Provides information about the status of the device and, at the same time, allows the user to interact with it. It consists on a backlight display and various LEDs for monitoring the status of the controller and buttons that allow the user to control, program and configure the functions of the unit.

#### MEASUREMENTS MODULE

Controls and monitors the control board. It is located in the rear part of the panel, in order to reduce the wiring and to avoid electromagnetic disturbances. Every signal, sensor and actuator is connected to this module.

The connexion between the visualization module and the measurements module is made with a CAN communication bus. This feature allows the intercommunication of other modules to the main controller with a scalability warranty.

### CEC 7

The CEC7 controller unit is a net sings supervision equipment, and control and supply supplier through generating set. The controller unit consists of 2 different modules:

- 1.The VISUALIZATION module
- 2.The MEASUREMENTS module

#### VISUALIZATION MODULE

The visualization module provides information about the status of the device and, at the same time, allows the user to interact with it. With this visualization module the user is able to control, program and configure the functions of the unit. It consists on a backlight display and various LEDs for monitoring the status of the controller and buttons that allow the user to control, program and configure the functions of the unit.

#### MEASUREMENTS MODULE

The measurements module controls and monitors the control board. It is located in the rear part of the panel, in order to reduce the wiring and to avoid electromagnetic disturbances. Every signal, sensor and actuator is connected to this module.

The connection between the measure module and visualization mode is made by means of a CAN BUS (Communication Bus). This produces an interconnection between additional modules which guarantees the proper working of the controller.

### CEA 7

CEA7 controller is a supervision equipment for mains signal and also a supervision and electrical supply through the genset. This controller is composed by 2 different modules:

- 1.VISUALIZATION module
- 2.MEASUREMENTS module

#### VISUALIZATION MODULE

The visualization module provides information about the status of the device and, at the same time, allows the user to interact with it. With this visualization module the user is able to control, program and configure the functions of the unit.

#### MEASUREMENTS MODULE

The measurements module controls and monitors the control board. It is located in the rear part of the panel, in order to reduce the wiring and to avoid electromagnetic disturbances. Every signal, sensor and actuator is connected to this module.

Connection between the measure module and visualization mode is made by means of a CAN BUS (Communication Bus). This produces an interconnection between additional modules which guarantees the proper working of the controller.





**HIMOINSA®**  
THE ENERGY

MODEL  
**HMW-1375 T5**  
HEAVY RANGE  
Container  
Powered by MTU

## Control & Power Panel

1. CM Control Panel.
2. CP Power Panel.
3. On/Off Switch..
4. Emergency Stop.
5. Main Line Circuit Breaker for overload protection.
6. Main bus /hardwire connection panel with safety protection.

## CE-7 Auto-start multilingual control panel

- |  |   |
|--|---|
| 1. Voltage between each Phase & Neutral        | 8. Fuel level   |
| 2. Voltage between Phases                      | 9. Oil pressure, coolant temperature, oil temperature   |
| 3. Current (amps) on each Phase                | 10. Battery voltage, battery charging alternator voltage  |
| 4. Frequency                                   | 11. Engine Speed  |
| 5. Active, Aparent & Reactive Power            | 12. Hours running   |
| 6. Power Factor                                | 13. Multilingual (Spanish, English, French, Italian, Portuguese, Polish, German, Chinesse, Russian, Swedish, Norwegian) |
| 7. Instant Power (KwH) and Accumulative power) |   |

## Engine Alarms

1. High coolant temperature.
2. Low oil pressure.
3. Battery charge alternator
4. Start failure.
5. Low water level.
6. Fuel storage.
7. Overspeed.
8. Underspeed.
9. Low battery voltage.
10. High coolant temperature by sensor.
11. Low oil pressure by sensor.
12. Low fuel level by sensor.
13. Unexpected shutdown.
14. Stop failure.
15. Low engine temperature.
16. Genset voltage drops.
17. Emergency stop.

## Genset Alarms

1. Over-load
2. Unbalanced voltage
3. Over voltage
4. Under voltage
5. Over frequency
6. Under frequency
7. Over load
8. Short-circuit
9. Inverse Power
10. Asymmetry among phases
11. Genset contactor Failure






## Mains Alarms

1. Maximum Mains Voltage.
2. Minimum Mains Voltage.
3. Maximum Mains Frequency.
4. Minimum Mains Frequency.
5. Mains phase sequence failure.
6. Mains power failure.
7. Mains contactor switching failure.

Programmable Alarms:  
There are 5 programmable alarms on text and action that could be associated to any engine alarms and showed on the auxiliary led 1 and 2 of the display



## Controllers Features

	CEM 7	CEC 7	CEA 7	CEM7 + CEC7
 <b>GENERATOR READINGS</b>				
Voltage among phases	.	.	.	.
Voltage among phases and neutral	.	.	.	.
Amperage	.	.	.	.
Frequency	.	.	.	.
Apparent power (kVA)	.	.	.	.
Active power (kW)	.	.	.	.
Reactive power (kVAr)	.	.	.	.
Power factor	.	.	.	.
 <b>MAINS READINGS</b>				
Voltage among phases	x	.	.	.
Voltage among phase and neutral	x	.	.	.
Amperage	x	.	.	.
Frequency	x	.	.	.
Apparent power	x	X	.	.
Active power	x	X	.	.
Reactive power	x	X	.	.
Power factor	x	X	.	.
 <b>ENGINE READINGS</b>				
Coolant temperature	.	X	.	.
Oil pressure	.	X	.	.
Fuel level (%)	.	X	.	.
Battery voltage	.	X	.	.
R.P.M.	.	X	.	.
Battery charge alternator voltage	.	X	.	.
 <b>ENGINE PROTECTIONS</b>				
High water temperature	.	X	.	.
High coolant temperature by sensor	.	X	.	.
Low engine temperature by sensor	.	X	.	.
Low oil pressure	.	X	.	.
Low oil pressure by sensor	.	X	.	.
Low coolant level	.	X	.	.
Unexpected shutdown	.	X	.	.
Fuel storage	.	X	.	.
Fuel storage by sensor	.	X	.	.
Stop failure	.	X	.	.
Battery voltage failure	.	X	.	.
Battery charge alternator failure	.	X	.	.
Overspeed	.	X	.	.
Underspeed	.	X	.	.
Start failure	.	X	.	.
Emergency Stop	.	.	.	.
 <b>ALTERNATOR PROTECTIONS</b>				
High frequency	.	.	.	.
Low frequency	.	.	.	.
High voltage	.	.	.	.
Low voltage	.	.	.	.
Short-circuit	.	X	.	.
Asymmetry among phases	.	.	.	.
Incorrect phase sequence	.	.	.	.
Inverse power	.	X	.	.
Overload	.	X	.	.
Genset signal droop	.	.	.	.

- Standard
- x Not included
- Optional

NOTE: All protections are programmable to make "warning" or "stop with cooling time" or "without"



## Controllers Features



### COUNTERS

	CEM 7	CEC 7	CEA 7	CEM7 + CEC7
Total hour counter	*	*	*	*
Partial hour counter	*	*	*	*
Kilowattmeter	*	*	*	*
Starts valid counters	*	*	*	*
Starts failure counters	*	*	*	*
Maintenance	*	*	*	*



### COMMUNICATIONS

RS232	*	*	*	*
RS485	*	*	*	*
Modbus IP	*	*	*	*
Modbus	*	*	*	*
CCLAN	*	X	*	*
Software for PC	*	*	*	*
Analogic modem	*	*	*	*
GSM/GPRS modem	*	*	*	*
Remote screen	*	X	*	*
Telesignal	*(8+4)		*(8+4)	*(8+4)
J1939	*	X	*	*



### FEATURES

Alarms history	(10) / (+100)	-10	(10) / (+100)	(10) / (+100)
External start	*	*	*	*
Start inhibition	*	*	*	*
Mains failure start	*(CEC7)	*	*	*
Start under normative EJP	*	X	*	*
Genset contactor activation	*	X	X	*
Main & Genset contactor activation	X	*	*	*
Fuel transfer control	*	X	*	*
Engine temperature control	*	X	*	*
Manual override	*	X	*	*
Programmable alarms	*	X	*	*
Genset start function in test mode	*	X	*	*
Programmable outputs	*	X	*	*
Multilingual	*	*	*	*

### SPECIAL FUNCTIONS

Positioning GPS	*		*	*
Synchronization with mains	*		*	*
Mains Synchronism	*		*	*
Second Zero suppression	*		*	*
RAM 7	*		*	*
Remote screen	*		*	*
Timer	*		*	*

- Standard
- x Not included
- Optional

CEC7: available when the controller CEC7 is incorporated to the installation

MPS 5.0: available application when the module MPS 5. has been incorporated to the panel.

Note: AS5 + CC2 configuration, will have all CEM7 functionality plus CEC7 mains readings.





**HIMOINSA®**  
THE ENERGY

MODEL  
**HMW-1375 T5**  
HEAVY RANGE  
Container  
Powered by MTU

## Generating Sets Standard and Optional Features

### Engine

- Standard air filter
- Standard fuel filter
- Standard oil filter
- Electronic management (ADEC)
- Coolant level sender
- Exhaust gas compensator
- Diesel engine
- 4 strokes-cycle
- Water-cooled
- 24V Electrical system
- Radiator with blowing fan
- Sender WT
- Senders OP
- Hot parts protection
- Moving parts protection

### Alternator

- Self-excited and Self-regulated
- IP23 protection degree
- Insulation H class

### Container version

- Soundproof insulation made of high density volcanic rockwool
- High mechanical resistance
- Low emissions level
- Door with window to visualize control panel, alarms and measurements
- Hoisting points reinforced for crane lifting and forklift pockets
- Residential silencer steel made, with -35dB attenuation and tilting cap in the exhaust
- Fuel tank integrated in the chassis
- Anti-vibration shock absorbers
- Steel chassis
- Manual oil extraction pump
- Robust construction designed for continuous or emergency applications



**HIMOINSA®**  
THE ENERGY

MODEL  
**HMW-1375 T5**  
HEAVY RANGE  
Container  
Powered by MTU

## Generating Sets Standard and Optional Features

### Container version

- Stainless steel fittings
- Emergency stops
- Easy access to the power connection
- Reinforced chassis for heavy range
- Easy access for chassis cleaning
- Silent-block with anti-corrosion protection between the genset and the chassis
- Easy access to fill radiator through the roof

### Container Electrical System

- Control panel and emergency stop button
- Power panel
- Battery charger (standard on automatic control panels)
- Pre-heating resistance (standard on automatic control panels)
- Battery charge alternator with ground connection
- Starting battery/ies installed and connected to the engine (supports included)
- Ground connection electrical installation with connection ready for ground pike (not supplied)
- 4 poles circuit breaker
- Power panel with safety protection in output terminals box (open thermal magnetic protection and alarm)
- Maintenance-free and anti-blast battery
- Battery isolator



**HIMOINSA®**  
THE ENERGY

MODEL  
**HMW-1375 T5**  
HEAVY RANGE  
Container  
Powered by MTU

## PDF Summary

Created : 14/10/2015 08:36

Author : Himoinsa

Number of pages : 11

Report Type: Data Sheet - Heavy range

Generated by: HIMOINSA Engineering Dept.

Page 1. Genset data

Page 2. Engine Specifications. Generator Specifications.

Page 3. Installation Data

Page 4. Dimensions

Page 5. Control Panels models + General Description

Page 6. Control box and power, CE7 Panel, Alarms

Page 7. Controller features (I)

Page 8. Controller features (II)

Page 9. Generator Features & Options

Page 10. Generator Features & Options

Page 11. PDF Summary (ID454E32333731303832)

[http://www.himoinsa.com/generating-sets/237\\_22/diesel-generator-hmw-1375-t5-mtu-50hz-heavy-range-prp\\_1370kva.aspx](http://www.himoinsa.com/generating-sets/237_22/diesel-generator-hmw-1375-t5-mtu-50hz-heavy-range-prp_1370kva.aspx)

